



AMCO


International Modern Industry

Flat Beds & Cargo Bodies

FBC-ST-FNT-V30-50

50T / 3 Axles / 40Ft



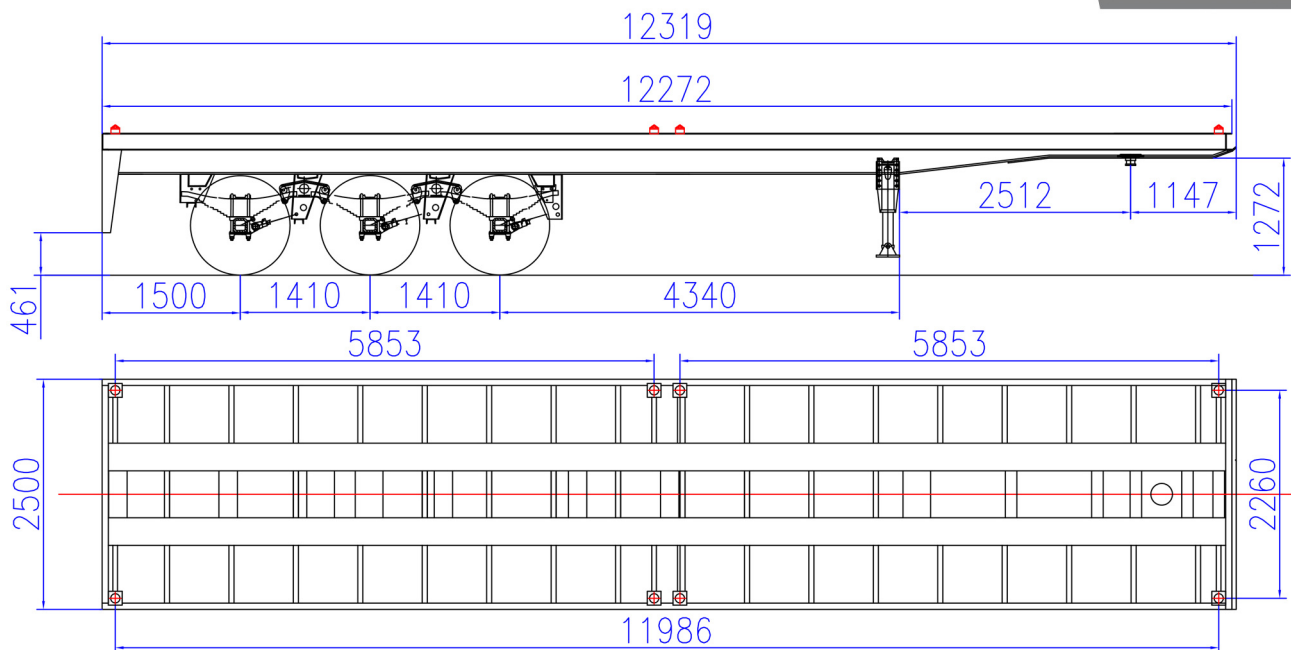

Above drawing and dimensions might be slightly different than actual trailer

FRAME CONSTRUCTION

- Main longitudinals from hot-rolled beams
- Transverses flanges meeting lower longitudinal flanges for frame sub-assembly
- Reinforcement flanges under main longitudinals at neck level
- Special longitudinal/transverses arrangement for minimum floor buckling
- All weldings done in flat position
- Checkered steel floor

RUNNING GEARS & SUSPENSIONS

- Heavy duty square hollow axles 3 x 18T
- VB version heavy duty multi-leaf suspension system
- Thick high tensile steel equalizers and hangers

WHEELS & TIRES

- 12 offset wheels of 22.5x9.00 size on all axles
- 12 high quality 315/80R22.5 20PR radial tires

BRAKES

- Two line air brake system
- Drum with good heat conductivity
- Air vessel with minimum needed volume
- Emergency relay valve
- Slack adjuster

TOWING SYSTEM

- 3.5" King pin, forged and heat treated
- Reinforced pick-up plate

LANDING GEAR

- Two speed, telescopic type, manually operated with universal base plates
- Needed static and lifting capacity
- Forged gears and internal parts

PAINTING WORK & FINISH

- Structure primed with synthetic enamel coating
- Synthetic enamel finish RAL 7021 black grey

ELECTRICAL OUTFIT

- Complete 24 volts electrical outfit with 7 poles socket and protected distribution cables
- Protected combined double rear lights including stoplight and direction indicator
- Position lights on sides

STANDARD ACCESSORIES

- Steel tool box
- Spare wheel carrier
- Lashing hooks
- Container retractable twistlocks (8)
- Rear mudguard

OPTIONAL ACCESSORIES

- Front short wall
- High/short sides
- Stanchions with side pockets
- Additional container twistlocks
- Diesel tank
- Spare tire
- Full mudguard
- Additional liftable axles
- Basket for tarpaulin
- Tarpaulin